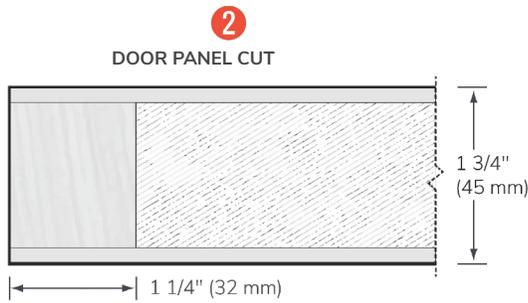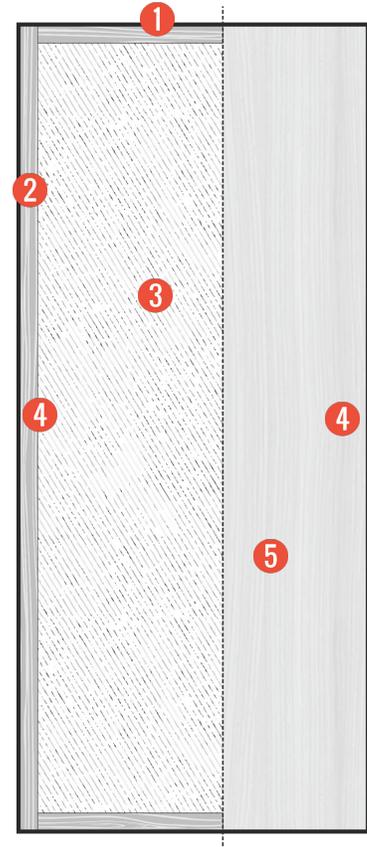**Door Width: Up to 60"**
Door Height: Maximum 120" non-rated

1 **Stile: 1 1/4" (32 mm)** Clear finger-jointed pine or equivalent

2 **Rail: 1 1/4" (32 mm)** Clear finger-jointed pine or equivalent

3 **Solid particleboard core**
Density: 28 lbs/ft³ (449 kg/m³)

4 **Integrated Reinforcement**

5 **Choice of finish**
solid or wood veneer panels (see product sheet)

DOOR PANEL CUT

1 3/4" (45 mm)

1 1/4" (32 mm)

RAIL CUT

1 1/4" (32 mm)

1 3/4" (45 mm)

Please note: All measurements are unfinished.

Type 1 water-resistant adhesive
Formaldehyde-free

20-minute fire resistance
(optional)

Lifetime warranty

Compliant with industry standards

- ANSI/WDMA 1.S.1A
- ANSI A208-1
- ASTM-D1037
- ASTM-D198-98
- AWS
- INTERTEK

Eligible credits
To earn credits, specify 'PUSM Eco Series'

LEED Canada -NC 2009

M.R. Q.E.I									I.D. P.R.	
3	4	5	7	5.1	5.2	3.2 op2	4.1	4.4	1.mo1	2
✓	✓	✓	✓			✓	✓	✓	✓	✓

LEED Canada -C1 (v1.0)

M.R.								Q.E.I			I.D.
3.1	3.2	4.1	4.2	5.1	5.2	7	3.2 opB	4.1	4.4	1.1	1.2
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓