
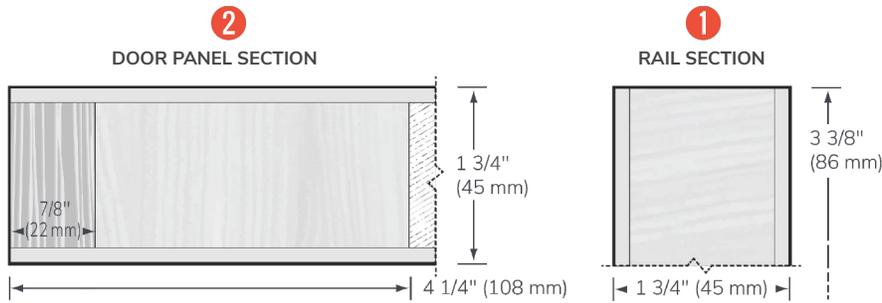


Door Width: Up to 60"
Door Height: Up to 120", non-rated

- 1 3 3/8" (86 mm) Rail LSL type**
- 2 4 1/4" (108 mm) Stile LSL type with 7/8" (22 mm) hardwood face accent**
- 3 Solid particleboard core**
Density: 28 lb/ft³ (449 kg/m³)
- 4 Integrated reinforcement**
- 5 Customizable Face**
Solid panels or wood veneer (see product sheet)

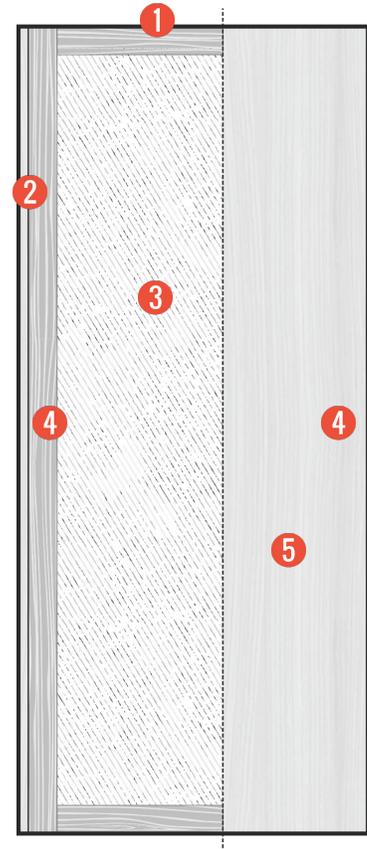

Please note all dimensions are nominal.

Type 1 waterproof adhesive
Formaldehyde-free

20-minute fire resistance
(optional)

Lifetime warp-resistant warranty

Meets industry standards

- ANSI/WDMA 1.S.1A
- ANSI A208-1
- ASTM-D1037
- ASTM-D198-98
- AWS
- INTERTEK

Eligible Credits

To qualify for credits, specify "PUSM Eco Series"

LEED Canada -NC 2009

M.R. Q.E.I								I.D. P.R.		
3	4	5	7	5.1	5.2	3.2 op2	4.1	4.4	1.mo1	2
✓	✓	✓	✓			✓	✓	✓	✓	✓

LEED Canada -C1 (v1.0)

M.R.								Q.E.I		I.D.		
3.1	3.2	4.1	4.2	5.1	5.2	3.2 opB	4.1	4.4	1.1	1.2		
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓