
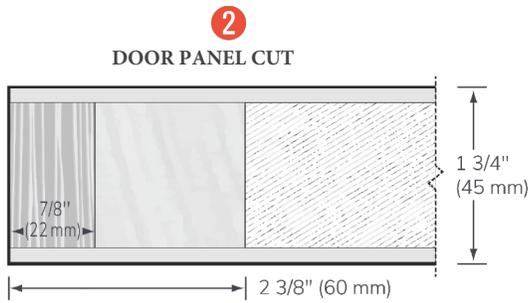


Door Width: Maximum 60"
Door Height: Maximum 120" non-rated

- 1 Rail: 1 1/4" (32 mm)**
SCL or equivalent
- 2 Stile: 2 3/8" (60 mm)** SCL including 7/8" (22 mm) of matching hardwood veneer
- 3 Solid particleboard core**
Density: (513 kg/m³)
- 4 Integrated reinforcement**
- 5 Face of your choice**
Rigid panels or wood veneer (see product sheet)

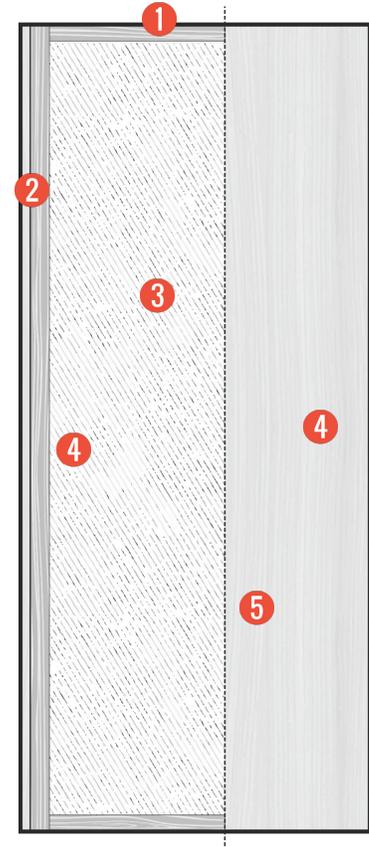

Please note: All dimensions are raw measurements.

Type 1 adhesive, waterproof

No added urea formaldehyde

20-minute fire resistance
(optional)

Lifetime warranty

Meets industry standards

- ANSI/WDMA 1.S.1A
- ANSI A208-1
- ASTM-D1037
- ASTM-D198-98
- AWS
- INTERTEK

Eligible credits

To qualify for credits, specify "PUSM Eco Series"

LEED Canada -NC 2009

M.R.				Q.E.I				I.D.	P.R.	
3	4	5	7	5.1	5.2	3.2 op2	4.1	4.4	1.mo1	2
✓	✓	✓	✓			✓	✓	✓	✓	✓

LEED Canada -C1 (v1.0)

M.R.							Q.E.I			I.D.	
3.1	3.2	4.1	4.2	5.1	5.2	7	3.2 opB	4.1	4.4	1.1	1.2
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓