
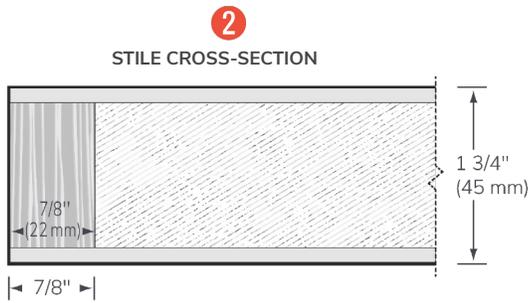


Door Width: Maximum 60"  
Door Height: Maximum 120" non-rated

- 1 Integrated rail**
- 2 7/8" (22 mm) hardwood stile**  
blends seamlessly with the surface
- 3 LSL wood core**  
density: 44 lbs/ft<sup>3</sup> (793 kg/m<sup>3</sup>)
- 4 Reinforced construction**
- 5 Face options** choose from solid panels or wood veneer  
(see product details)

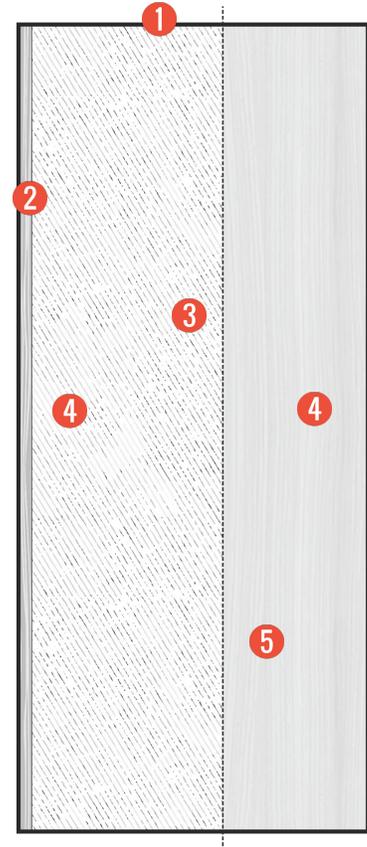

Please note: all dimensions are nominal.

**Type 1 adhesive, water-resistant**  
Formaldehyde-free

**20-minute fire resistance**  
(optional)

**1-year warranty**

**Compliant with industry standards**

- AWS
- ANSI/WDMA 1.S.1A
- ANSI A208.1
- ASTM-D1037
- ASTM D198-98
- INTERTEK

**Eligible for credits**

To qualify for credits, specify "PUSM Eco Series"

LEED Canada -NC 2009

M.R. Q.E.I							I.D. P.R.			
3	4	5	7	5.1	5.2	3.2 op2	4.1	4.4	1.mo1	2
✓	✓	✓	✓			✓	✓	✓	✓	✓

LEED Canada -C1 (v1.0)

M.R.							Q.E.I			I.D.	
3.1	3.2	4.1	4.2	5.1	5.2	7	3.2 opB	4.1	4.4	1.1	1.2
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓