
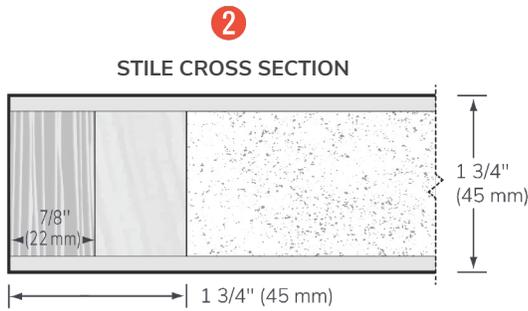


- 1 1 1/4" (32 mm) Rail**
Clear finger-jointed pine or equivalent
- 2 1 3/4" (45 mm) Door Leaf**
LSL core with 7/8" (22 mm) hardwood face matched to the surface
- 3 Agrifiber core**
- 4 Built-in reinforcement**
- 5 Face options** High-density panels or wood veneer (see data sheet)

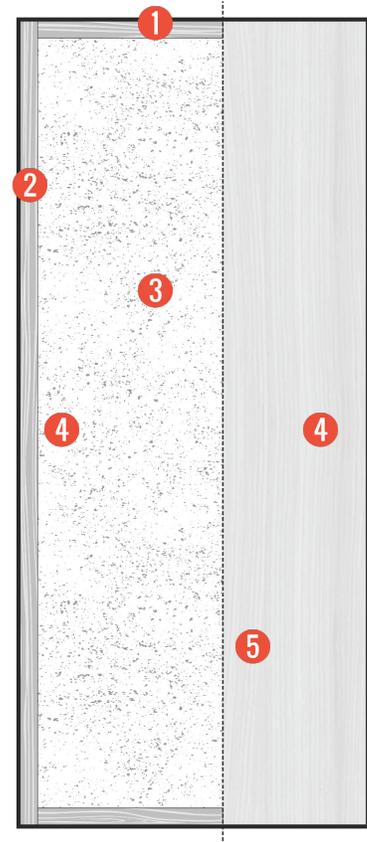

Please note all dimensions are nominal.

Type 1 water-resistant adhesive

No added urea formaldehyde

45-minute fire rating

Included

Lifetime warranty

Compliant with industry standards

- ANSI/WDMA 1.S.1A
- AWS
- INTERTEK

*** To maintain warranty and meet fire rating standards, pre-machining must be performed by Porte Saint Michel or an authorized distributor.**

**** Some applications may require additional blocking in specific locations.**

SAINT-MICHEL DOORS

8208 Albert-Louis-Van Houtte Avenue, Montreal, Quebec H1Z 4J8

Eligible Credits

To receive credits, specify "PUSM Eco Series"

LEED Canada - NC 2009

M.R.					Q.E.I			I.D.	P.R.	
3	4	5	7	5.1	5.2	3.2 op2	4.1	4.4	1.mo1	2
✓	✓	✓	✓			✓	✓	✓	✓	✓

LEED Canada - C1 (v1.0)

M.R.							Q.E.I			I.D.
3.1	3.2	4.1	4.2	5.1	5.2	7.3.2 opB	4.1	4.4	1.1	1.2
✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



(514) 725-3544

portes-st-michel.com