

1 1 1/4" (32 mm) Rail

Clear finger-jointed pine or equivalent



2 1 3/4" (45 mm) Stile

LSL core with 7/8" (22 mm) hardwood face matched to the surface

3 Agrifiber core

4 Built-in reinforcement

5 Face options High-density panels or wood veneer (see data sheet)

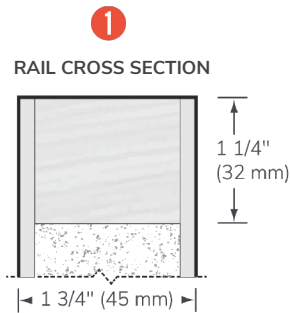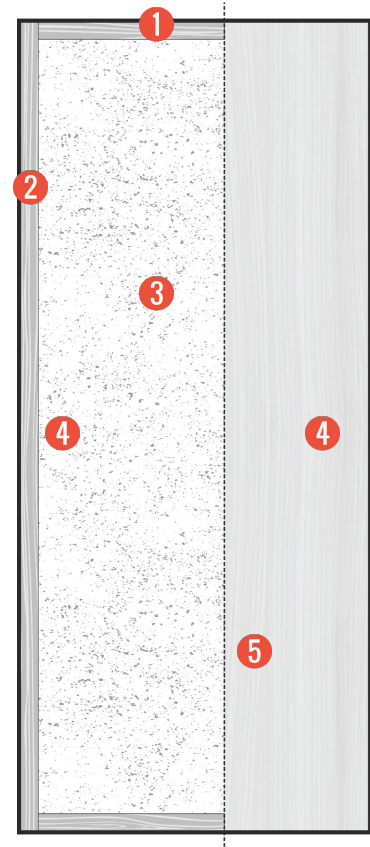

Please note all dimensions are nominal.

Type 1 water-resistant adhesive

No added urea formaldehyde

45-minute fire rating

Included

Lifetime warranty

Compliant with industry standards

- ANSI/WDMA 1.S.1A
- AWS
- INTERTEK

*** To maintain warranty and meet fire rating standards, pre-machining must be performed by Porte Saint Michel or an authorized distributor.**

**** Some applications may require additional blocking in specific locations.**